

missiles and rockets

MAGAZINE OF WORLD ASTRONAUTICS

AN AMERICAN AVIATION PUBLICATION



The HY-V/L fuel booster and transfer pumps that Hydro-Aire has produced in the last three years for aircraft and missiles will deliver 734,576 gallons in a single minute...

... and they are doing it right now on Chance-Vought's Regulus I & II; Fairchild's Bull Goose; McDonnell's Green Quail; McDonnell's F-101; Chance-Vought's F8U-1, -2, and -3; Boeing's B-52; North American's F-100D; Lockheed's F-104A; Douglas' F5D; Convair's B-58; and Avro's CF-105. Whether your requirement calls for electric motor driven, hydraulic motor driven or turbine driven pumps; whether they must pump jet fuel, alcohol, LOX or water the world's fastest-growing manufacturer of airborne fuel booster and transfer pumps is at your service.



Producing Controls for Every Basic Airborne System

... speaking of



When the Boeing Bomarc IM-99 is launched, FMC-built ground support equipment will be used.

BOMARC PROGRAM

Erectors, launch bases, flame deflectors and power control units, production-engineered and manufactured by FMC under a Boeing contract, automatically position the long-range surface-to-air missiles for firing.


FMC's capability for economical production, resulting from over 17 years' experience in designing and producing defense materiel, has effected important savings in the ground support equipment phase of the Bomarc program.

FMC will assume full responsibility for any phase of your missile ground support equipment project, fixed or mobile, from design concept through development, engineering and production. Long experience with military requirements and completely integrated facilities devoted exclusively to the manufacture of defense equipment are further assurance of on-schedule delivery. Consult with FMC at the initial stage of project planning. Contact us today for more information.

Creative Engineers: Find stimulating challenge at FMC's Ordnance Division.

> Operated by the Air Defense Command, a Boeing Bomarc climbs skyward from its launcher. FMC is building ground support equip-ment for this supersonic missile.







FOOD MACHINERY AND CHEMICAL CORPORATION **Ordnance Division**

Missile Equipment Section 1-L

1105 COLEMAN AVENUE, SAN JOSE, CALIF.

R/M PYROTEX® REINFORCED PLASTICS ...DEVELOPED TO ENDURE THE FIERY REALM OF THE ROCKET

Light, strong, heat resistant . . .
for low-cost, precision fabricated rocket parts—
both structural and aerodynamic



Looking for a material that will withstand the elevated temperatures generated by missiles and rockets—internally from burning propellants, externally from aerodynamic heating? Must this material have good insulation and thermal properties, chemical and water resistance, and take a smooth finish? If so, one of R/M's family of Pyrotex reinforced plastics may be the solution to your problem.

The many outstanding thermal and structural features of R/M Pyrotex have led to its use on almost every U.S. missile. It has been fabricated into parts such as nose cones, fins, igniter tubes, rocket throats and silver traps. Its exceptionally good dimensional stability makes possible mass production to precision standards. And it is low in cost. Write for additional information.



RAYBESTOS-MANHATTAN, INC. REINFORCED PLASTICS DEPARTMENT, Manheim, Pa.

FACTORIES: Manheim, Pa.; Bridgeport, Conn.; Paramount, Calif.; No. Charleston, S.C.; Passaic, N.J.; Neenah, Wis.; Crawfordsville, Ind.; Peterborough, Ontario, Canada

RAYBESTOS-MANHATTAN, INC., Asbestos Textiles • Laundry Pads and Covers • Engineered Plastics • Mechanical Packings • Sintered Metal Products • Industrial Rubber • Rubber Covered Equipment • Brake Linings Brake Blocks • Abrasive and Diamond Wheels • Clutch Facings • Industrial Adhesives • Bowling Balls

Editor			 Erik	BERGAUST
Execut	ive .	Editor	 CLARKE	NEWLO
News 1	Edit	or	 DONALD	E. PERR

ASSOCIATE EDITORS:

NORMAN L. BAKER Engineering & Production
RAYMOND M. NOLAN Electronics & Guidane
PEER FOSSEN Tracking & Ground Suppor
WILLIAM O. MILLER
ALFRED J. ZAEHRINGER Propulsion & Chemistr
E. M. CROMLEY Congress & Governmen

ASSISTANT EDITORS:

REED	BUNDY	Business	New
PAUL	MEANS	ARPA &	NAS

CONTRIBUTING EDITORS:

F. I. ORDWAY III, H. CANNEY and
R. C. WAKEFORD
DR. ALBERT PARRYSoviet Affair
DR. HUBERTUS STRUGHOLD Space Medicin
DR. I. M. LEVITT
K. W. GATLAND and G. V. E. THOMPSONGreat Brita

EDITORIAL ADVISORY BOARD:

DR. WERNHER VON BRAUN		ROBERT	P. HAVILA
DR. PETER CASTRUCCIO	DR.	ARTHUR	KANTROW
KRAFFT A. EHRICKE		DR. EU	GEN SAEN
RICHARD F. GOMPERTZ		ALEX	CANDER SAT

REGIONAL EDITORS:

F. S. HUNTER, FRANK MCGUIRE, R. VAN OSTEN Beverly Hills, Calif., 8929 Wilshire Bl
ANTHONY VANDYKGeneva, Switzerla 10 Rue Grenus, Phone 321
JEAN-MARIE RICHE11 Rue Condorcet, Paris

PRODUCTION:

WILLIAM H. MARTINArt	Direct
COLLIS CAMPBELL	Direct
JOHN WALEN Production	Manag
ELSIE GRAY Asst. Production	Manag

WAYNE W. PARRISH President & Publisher

LEONARD A. EISERER
C. A. HURT Assistant Publish
EDWARD D. MUHLFELD Advertising Sales Mana
LAWRENCE BRETTNER Circulation Direct
STEPHEN A. RYNAS Advertising Promotion M
DAGFINN T. FOSSENResearch Manag
GLADYS BUSSELLAdvertising Service M

missiles and rockets Vol. 5, No. 3, Jan. 19, 1

Published every week by American Aviat Publications, Inc., 1001 Vermont Ave., N. Washington 5, D.C. Printed at the Telegra Press, Harrisburg, Pa. Second class postage p at Washington, D.C., and at additional mail offices. Copyright 1958, American Aviation P. lications, Inc.

Subscription rates: U.S., Canada and Post Union Nations—i year, \$8.00; 2 years, \$12.0 3 years, \$14.00, Foreign—i year, \$20.00; 2 years \$30.00; 3 years, \$40.00. Single copy rate—\$.7 Subscriptions are solicited only from person with identifiable commercial or professioni interests in missiles and rockets. All subscription orders and changes of address abould i referred to: the circulation fulfillment department.









missiles and rockets

MAGAZINE OF WORLD ASTRONAUTICS

JAN	LIARY	19	HF4	DIINE	١

Soviet	space lead estimated at 12 to 18 months; U.S. will require
5 year	s to catch up
M-D-	musil Cata Manager Assessed
	nnell Gets Mercury Award
Collin	s Radio and Minneapolis-Honeywell selected as subcon-
tractor	's for first manned capsule

ASTRONAUTICS-ENGINEERING

Lockheed Space	Station Interesting	Government Agencies	i
Satellite laboratory	could be in operation	on in 10 years; Cost	
estimate is put at	\$2.163 billion		19

MISSILE ELECTRONICS

Gyro Drift De	manding	New Me	asurement Tec	hniques
Drift techniques	used in Th	M-76 Mace	are summarized	22

DEPARTMENTS

In My Opinion 9	Space Age29
Washington Countdown13	Astrionics3
Industry Countdown15	Contract Awards33
When and Whose	2.4



COVER: Biggest "rubberneckers" at Canaveral missile firings are the newsmen. (See p. 18)



UNDERGOING TESTS at Rocketdyne using conventional fuels is *Kiwi-A*, part of *Rover* program.



THIS GADGET is providing new measurement techniques at Martin for gyro drift. (See p. 22)



TUGS AND taxis are part of Lockheed's proposal for manned space laboratory. (See p. 19)



RADAR SYSTEM for Nike-Zeus will require this mammoth ball bearing, supporting million lbs.

HOW SMALL



COMPONENTS BE?

Synchros and associated components now can be small enough and light enough for use in many crucial assignments where size and weight must be minimal. Ketay has led the way in miniaturization without

sacrifice of performance and environmental resistance.

Ketay's size 8 components meet and surpass current MIL design objectives.

They are available in production quantities to meet strict delivery schedules.

Notable examples of Ketay competence in miniaturization include:

Size 8 synchros—only Ketay offers a complete line including high impedance units. Exclusive construction features—as well as stainless steel housing and materials of matched temperature coefficients—help assure high accuracy over a wide temperature range and resistance to corrosion and deformation.

Size 8 servo amplifiers—only Ketay offers transistorized 0.8 cubic inch units which deliver 2 watts output continuously from —55° to 100° C without a heat sink; 200 to 1000 volt normal gains can be supplied.

Size 8 servo motors—Ketay offers units of outstanding high ratio of stall torque to power input (0.25 oz. in. for 3.4 watt input at 6500 rpm), center-tapped for transistorized applications.


Ketay engineers are regularly working on advanced new components and prototype control systems. Call or write for help in solving your special problems.

Kelay precision components: SYNCHROS RESOLVERS POTENTIOMETERS SERVO MOTORS TACHOMETERS SERVO AMPLIFIERS GYROMECHANISMS

Catalogues available

NORDEN * DIVISION of United Aircraft Corporation

KETAY DEPARTMENT, Commack, Long Island, N.Y.

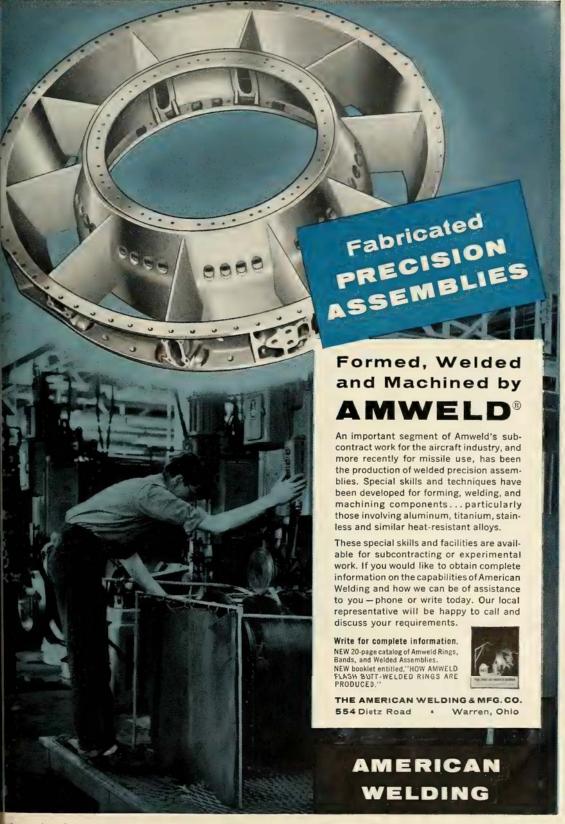

Clary brings you valves...

for extreme accuracy under wide variations in inlet pressures and flow

These Clary high-flow pressure regulator valves maintain outlet pressures with extreme accuracy under wide variations in inlet pressures and flow. Each incorporates a pneumatic amplifier to control large forces with a small signal energy, and is designed for use in a wide variety of jobs.

These valves are engineered and manufactured by Clary the company whose long experience, outstanding staff, and complete facilities for extreme environmental testing have made it one of the nation's largest manufacturers of rocket and missile valves.

ABSOLUTE PRESSURE REGULATOR maintains an outlet pressure of 181/2 to 20 PSIA with variations in flow rate from 3 to 350 SCFM under 30 to 100 PSIA inlet pressure and -65°F. to +350°F.

Weight: 2.1 pounds Length: 8.55 inches Tube Size: Inlet: 1.50 inches Outlet: 2.00 inches

DIFFERENTIAL PRESSURE REGULATOR maintains an outlet pressure of 6 PSIG ±.25 with flow variation from 3 to 160 SCFM under 10 to 250 PSIG inlet pressure and -65°F. to +350°F.

Weight: 1.5 pounds Length: 4.00 inches. Tube Size: Inlet: .75 inches

Outlet: special flange



Clary Dynamics

San Gabriel, California

Manufacturer of business machines. electronic data-handling equipment, aircraft and missile components.



In My Opinion ...

. . . members of the 86th Congress must familiarize themselves with some rough and basic problems before they start legislating and politicking in the areas of space flight and missiles. It is gratifying that the House Select Committee on Astronautics and Space Exploration understands the importance of the military aspects of space flight, stressed in the recent RAND Corporation Report. Certainly, it is gratifying that the Committee sees fit to endorse the report, which disagrees with published opinions of some "experts" and flatly declares that satellites can be used as bombing platforms and weapon carriers and that nuclear bursts can be effective in space.

It is only to be expected that members of the House and Senate committees during the past year were able to learn a bit about astronautics. But how much time were other legislators able to devote to the subject? In the end, their opinions will decide the destiny of this country. These representatives—just like every man and woman in the country—must take the time necessary to fully grasp the scope

of the missile and space age.

It is particularly important that members of the new Congress learn about the urgent need for boosting and streamlining our current and active missile programs, and how these programs fit into the total defense pattern. This is not an easy task; it puzzles the most competent experts in the Department of Defense. Duplication of efforts in some missile programs is wasteful, in others it is useful. Some research and development programs lead our missile builders nowhere, other research shows them the road to advancement and success. Certain missiles are advanced enough to merit stepped-up production; other missiles should have been cancelled long ago.


Our lawmakers cannot be expected to familiarize themselves with all of our missile systems. But they must be expected to seriously study the "big ones," which represent billions of dollars every year and are weighing factors in the shaping of

overall defense strategy.

Perhaps the greatest danger in judging the feasibility of these missile systems—the IRBMs and the ICBMs—is that so many of us tend to jump to conclusions when a single one of these missiles is fired or misfires. In the wake of the first "unsuccessful" tests of the *Titan*—which followed our glamorous propaganda satellite, the *Atlas*—we have heard many so-called experts call for cancellation of the *Titan* program. This attitude is not only immature, it is downright dangerous. The *Titan* program, in its present accelerated status, is very promising. A recent tour of *Titan* development facilities has proven this to us. The *Titan* program is in high gear and must be continued.

Finally, members of Congress should take time out to study the feasibility of the *Polaris* program—another advanced weapons system which does not have the support it deserves. *Polaris* is just as advanced as *Titan*—perhaps further advanced. And the concept itself is the most advanced of all long-range missile systems. This program must get more financial support from Congress. We have programmed less than half the amount of submarines needed to make the *Polaris* weapons system completely global and self-sustained as a complete deterrent if other forces become inadequate or paralyzed by instant attack. It takes very little expert knowledge of missilery to understand the importance of pushing both *Titan* and *Polaris*—in addition to *Atlas, Minuteman, Jupiter, Thor* and *Pershing*.

Luck Begarest

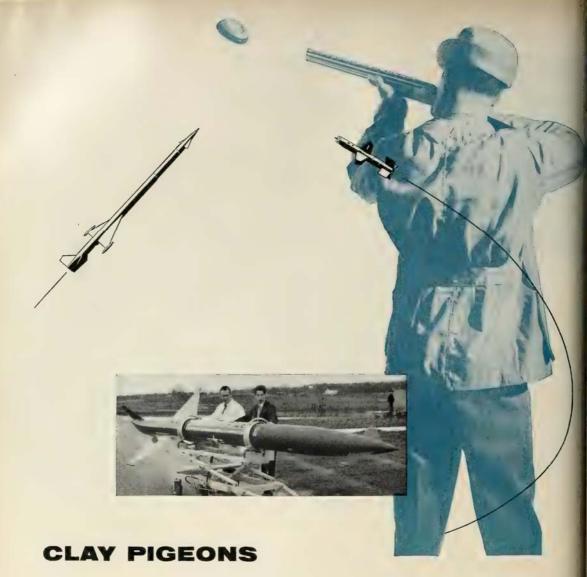

low-cost, supersonic target drones

Clay pigeons that fly faster than sound—that's a nutshell description of the new low-cost target drones developed by Bendix Systems Division.

Program-controlled (with radio override, if desired) they will provide the answer to our need for airborne target drones which can be built in quantity and at a moderate cost. They are ideal vehicles for testing the effectiveness of our new aerial weapon systems, as well as the skill and training of the men who fly or launch them.

The basic design, developed over a two-year period (at no cost to the American taxpayer), is relatively small and light, which accounts in part for its low cost, and carries radar and infrared augmentation equipment which enables it to realistically simulate a much larger target if desired.

It can operate at all required altitudes, speeds and rang

Bendix target drones realize small diameter, and he low cost, by means of the Bendix Lens, a small plas sphere for enhanced bistatic, as well as monostatic reflection. Also included are Bendix electronic scorl devices for a miss distance indication. Components a airirame tests are continuing in conjunction with a Armed Services.

Bendix Systems Division, working with six of Bendix Divisions and major aircraft and propuls organizations, directed all phases of development w up to and including prototype construction and test

Bendix Systems Division welcomes inquiries and prepared to provide full information to the Armed For

Bendix Systems Division

ANN ARBOR, MICHIGAN





P&H Combination AC-DC Welders

with ON-OFF automatic high frequency

These dual-purpose welders are ideal for super-critical welding because they offer you:

- · pre-set gas and water timing
- foot-operated remote heat adjustment and primary contactor control
- · high-frequency intensity and phase-shift rheostats
- · ON-OFF soft start
- specially built sequence timing for any requirement

Get the complete work- and moneysaving story. Write to:




HARNISCHFEGER

WELDERS · ELECTRODES · POSITIONERS

Milwaukee 46, Wisconsin







Heat, load, shock, stress, pressure,

the missile week

washington countdown

Contract for Dyna-Soar . . .

may be awarded around April 1—three months in advance of original July 1 target date—because of good preliminary work by the competing teams, Martin and Boeing.

Competition is keen . . .

on the WS-199 air-launched ballistic missile under feasibility test. Martin's two-stage solid has been launched 1000 miles from B-47. Lockheed's single-stage version reportedly has gone 230 miles. Former is touted as adaptable for B-47, B-52, B-58 and C-135. Latter, for high-altitude aircraft such as B-58, reportedly could be available within two years. Air Force may give go-ahead within 30 days.

DOD missile management . . .

may be investigated by the House Government Operations Committee. The probe is prompted by AF's refusal to surrender its Inspector General's investigation of ballistic missile program management.

Nixon disagrees . . .

with the House Space Committee's estimate that the Soviet Union has a 12-to-18-month lead in space development. The vice-president was quoted as saying we are ahead in missiles and catching up fast in other phases. But Sen. Stuart Symington (D-Mo.) challenged Nixon to furnish comparative percentages on USSR/U.S. missile strength. Symington also charged that DOD has no intention of releasing funds voted this fiscal year for Minuteman and Hound Dog.

The Polish People's Republic . . .

is reported to have successfully launched an experimental rocket weighing 9.6 lbs. It was approximately 32 inches long and 2.5 inches in diameter, utilizing 2.2 lbs. of solid fuel. Launching was made from an inclined ramp about 10 feet long at an angle of 80°. Tracking was by theodolite located at three points. A report also indicates that Polish scientists are testing the first stage of a meteorological rocket.

Upper stage for Atlas . . .

probably will utilize hydrogen and oxygen in P&W's development. Convair last week received contract to develop and build the upper stage. Development time of engine and the stage probably will be in excess of two years, but should give satellite orbital capability of several thousand pounds under ARPA's Discoverer program.

Soviets made certain . . .

there would be no question as to who launched the first space vehicle if the pieces are ever found. The Lunik rocket carried a sphere of pentagonal segments marking it as USSR property and noting the launching date. If the sphere strikes something, it will break into smaller fragments, each bearing USSR inscriptions.

Resignation of Dudley Sharp . . .

Assistant Secretary of Air Force for Materiel, effective Jan. 31, does not mean USAF will abolish this office under the reorganization of DOD. The duties of another assistant secretariat probably will be divided between a colleague and the under secretary.

When news leaked . . .

about the Air Force requesting seven additional *Titan* squadrons, the USAF legislative liaison office was the whipping boy. Colorado congressmen (the *Titan* is assembled at Denver) thought they should have made the announcement. The money, incidentally, is very likely to be appropriated despite possible DOD and Budget Bureau objections.

Training to snatch satellites . . .

out of the air is the USAF 6593
Test Squadron flying Fairchild C-119s out of
Hickam AFB, Hawaii. Led by Maj. Joseph
C. Nellor, the squadron is practicing two
techniques: capturing the satellites (first Discoverer and later Mercury) as they floatdown by parachute; and pinpointing the
descending vehicles for recovery by helicopter
or seacraft.

Sparrow III carries warhead . . .

50% more powerful than any other air-launched guided missile, Navy says. Other vital statistics of Raytheon missile include 1500 mph speed, average range of five miles and all-weather capability.

Fly in the ointment . . .

delaying transfer of Chincoteague Naval Air Station to NASA is Sen. Harry F. Byrd (D-Va.). Byrd is concerned about his 760 constituents employed at the 2,340 man Naval base who will be out of jobs.





huge rocket engines, the seven-story Atlas intercontinental ballistic missile roars upward from its Cape Canaveral launching pad. Quickly it sheds the frost encrusting the liquid oxygen tank and races to its predetermined destination in the far reaches of the globe. In its size and range and capability, the Air Force Atlas is a commentary, for all the world to heed, of the necessity to maintain the peace. RCA's Missile and Surface Radar Department has been privileged to design and develop ground check-out, launch control and cabling equipment as a major subcontractor to Convair (Astronautics) Division of General Dynamics Corporation, the Atlas prime weapons systems contractor.



DEFENSE ELECTRONIC PRODUCTS

CAMDEN, N. J.

the nissile week

industry countdown

Lockheed's latest contract . . .

will continue flights of the X-7 ramjet test vehicle through 1959. The contract may be in excess of \$8 million when it is finalized sometime next month. The X-7, equipped with one Marquardt ramjet similiar to the one used on the *Bomarc*, is testing components that will be used on advanced interceptor missiles.

Silica Gel has proven . . .

to be a versatile chemical in several space experiments. The desiccant or drying agent, produced by W. R. Grace & Co., Davison Chemical Div., reports that it has been used to maintain favorable conditions for animals sent into space, and to protect mechanisms prior to launching. For example, STL reportedly used the gel to absorb respiratory moisture in the mouse capsule in the *Thor-Able* flights. Martin reportedly is using about 35 pounds on each *Vanguard* for protection of components.

An air gage tracer lathe . . .

built especially for the missile and space industry, will be delivered this week to Diversey Engineering Co. With a swing of 86 inches and 25 feet between centers, the lathe reportedly is capable of handling the largest rocket motors—Polaris, Pershing and Minuteman. Lathe could handle, with modification, Diversey said, diameters in excess of 10 feet.

Johns Mansville has made its bid . . .

as major competitor in the expanding fiber glass industry by acquiring L.O.F. Glass Fibers Co. of Toledo. The new division, a research, development and production facility, will take the strain off seven plants now operated by Johns-Manville. Current J-M glass sales are \$25 million a year, in addition to normal sales of other products of more than \$300 million annually.

Subroc motor . . .

will be designed and developed by the Elkton Div. of Thiokol Chemical Corp. The subcontract from Goodyear, is reported to be slightly under \$5 million, and will include loading and firing of test units. Subroc may be fired from above or below the surface, will detect submarines at long range, compute their course and speed, and will set an intercept course.

Billion dollar year . . .

has been forecast for Lockheed Aircraft Corp. in 1959. With net earnings 10 percent above last year's level, the company expects a broader participation in the missile and space market than in 1958. Almost 3000 of Lockheed's employees are working in fields directly related to missiles and space.

First shipment of Honest John . . .

rockets for the West German armed forces are now being installed for training purposes. The training versions of the Douglas-Emerson Electric missile will be equipped with cement warheads. U.S. forces will retain possession of the atomic warheads.

Busy economy axe . . .

penetrated the R&D program of the RAT anti-submarine missile with cancellation of the program at the end of existing contracts. Librascope, Inc., developers of fire control and providing over-all management, and Clevite, developer of the torpedo, after completing a Navy award of \$15 million, will not have their R&D contracts renewed.

Modification of ABMA's . . .

12-story-high vertical test stand is underway by Jones Construction Co., of Atlanta. The change is designed to accommodate the 1,300,000-lb.-thrust Rocketdyne cluster of Jupiter engines. The construction firm's \$97,954 contract calls for dismantling, demolition work, and driving of piling.

"Worth their weight in gold . . ."

is the way President Eisenhower described "certain bombers"—later identified as the B-58 Hustler, in his State of the Union message. At the current rate of production, the B-58, weighing in at 47,000 lbs., costs \$26.7 million or about \$567 per pound. Gold costs about \$500 per pound.

About \$35-million per copy . . .

is what the President figures Atlas will cost, "on the firing line." Air Force spokesmen, however, estimated the cost at \$20 million each, including ground support equipment, and its off-the-shelf cost at \$2 million.



THE SPIRIT OF '76 . . . exemplifying strength—dependability—determination to move forward through the years.

Wyman-Gordon enters its 76th year still forging ahead with new forging techniques—still meeting the challenge of the seemingly impossible in this age of power and speed on the ground—in the air—and in outer space.

It is a far cry from the modest beginning in

1883 to the forging industry's most modern testing and research facilities in the extensive laboratories of Wyman-Gordon today—assurance of the ultimate in forging quality.

From the high wheel bicycle through the "horseless carriage" days to the "Mach era" of aircraft and space vehicles, Wyman-Gordon has marched under the standard of "The Greatest Name in Forging."

WYMAN-GORDON COMPANY

Established 1992

FORGINGS OF ALUMINUM . MAGNESIUM . STEEL . TITANIUM

WORCESTER 1, MASSACHUSETTS
HARVEY, ILLINOIS DETROIT, MICHIGAN

RAND Report Should Guide 86th Congress

Soviet space lead estimated at 12 to 18 months; U.S. will require 5 years to catch up, Congress told. Report says satellites can be used as bombers and atomic explosions can be effective in outer space.

by Paul Means

WASHINGTON—The "Space Handlock" drawn up by RAND Corp. as a yman's guide is likely to find use also a blueprint for an 86th Congress xious to expand and speed up merica's space effort.

The document, released by the ouse Select Committee on Astroutics and Space Exploration, ensions attempts at landings on the moon, enus and Mars, and manned satellites orbit around the earth within the axt five years—using modifications of esent missile hardware.

It flatly disagrees with published inions of other experts and declares at satellites can be used as bombg platforms and that atomic bombs n be effective in airless outer space.

In the last, busy week of its existce, before being replaced in the new ongress by a Standing Committee on acc and Astronautics, the select oup took two other actions undering the urgency of the picture.

It issued a final report saying among her things that the Soviet space lead pears to be from 12 to 18 months—d that it will take the U.S. five years catch up.

And it released a statement by airman John W. McCormack (Dass.) warning that "we can't afford have a Pearl Harbor in outer ace..."

• Definitive work—The RAND rert, which the Committee will send the nation's high schools and inested educational institutions, is one the most definitive treatises on space hnology and applications yet to apar in lay language.

The 225-page document breaks wn space technology into 17 areas, the extensive studies of space environment, trajectories and orbits, vehicles, opulsion and propellants, guidance, mmunication, observation, landing d recovery, space stations and extra-

terrestrial bases, and the effects of nuclear weapons in space.

It also applies present technology to the problems of orbiting and instrumenting observation, meteorological, navigation, communication and bombing satellites. It attempts to define the immediate possibilities of scientific space exploration.

• Hardware exists—By modifying present missile hardware, the report asserts, the U.S. can orbit satellite payloads of 10,000 pounds at 300-mile altitudes, or 2,500-pound payloads at 22,500-mile altitudes.

It says the same hardware can also land, intact, 1,000 pounds of instruments on the Moon, Venus and Mars, probe the atmosphere of Jupiter with the same payload and place a manned satellite around the earth, recoverable after a few days of flight.

Present hardware requires "additional work of a very substantial nature, the report warns, but "with diligence and reasonable luck, the overall rocket machinery necessary to attempt any of these flights could be available in a few years—probably less than five."

Within the next five years, new engine developments "should" allow us to "look forward to the day when the payloads listed above will be five to 10 times greater," the report said.

RAND'S handbook asserts that a bomb shot from behind a 350-mile-high satellite with a velocity of 1,000 feet per second—the approximate speed of a 75-mm field gun's shell—will cover a distance of 6,300 miles.

It claims that guidance under these conditions would be no more difficult than that with the surface-launched ICBM, except that exact location of the satellite would be necessary.

The advantage of satellite-bombers, according to the report, is that they could be launched under favorable conditions long before they are needed.

Multi-megaton nuclear bombs which produce sufficient radiation to kill a man can be used effectively against manned space vehicles over long distances, the report states. Even though the effects of an atomic blast are almost neutralized in vacuum-approaching space, it says, the radiation would travel farther than in the dense lower atmosphere.

Other information revealed in the report:

- The Russian 1120 pound *Sputnik II* had a total orbiting weight (including final stage rocket) of from 4.4 to 6.6 tons.
- The Russians will soon announce a successful manned-rocket flight.
- A fairly good Russian guidance system is indicated by the slight deviation in perigees (from 139.5 to 141.3 miles) of Sputniks I through III.
- The major Soviet satellite launching site is on the Kyzl Kum Desert, 248 miles southeast of the Aral Sea.

The Committee's final report states that "according to the best available estimates it will take the United States 12 to 18 months to do what the Soviet Union is doing now."

Moreover, according to the Committee, it will take the United States "at least five years to catch up in the sense of doing equivalent things in space at about the same time."

Chairman McCormack pointed to the recent Soviet cosmic rocket as a symbol of the urgency of maintaining a strong and consistent effort in space research and exploration.

The report's major criticism of present space programs is that decisions are based on short-run budget pressures.

"To be effective, the American space program must be long-range, flexible and continuous, with special emphasis on research," the report declares.

The Soviet Union, according to the report, boosted its scientific research outlay by 15 per cent. In view of its present space lead, the U.S., according to the report, "cannot afford to do less."

Other shackles holding down the nation's space program, according to the report, are undue security restrictions, lack of scientific and technical cooperation among the nations of the free world, and science education.

McDonnell Gets Mercury Award

by Clarke Newlon

WASHINGTON—"The conquest of space is such a fantastic, gorgeous and colossal subject that it's hard to know where to begin." The words were those of President James S. McDonnell of the McDonnell Aircraft Corporation.

Actually he knew very well where to begin. First, by creating a corps of design engineers comparable to any in the industry; second, by enlisting the cooperation of top people in top industries in the allied field; third by dumping a third of a million dollars into the project before bids were solicited in December. "We started last Spring," says McDonnell, "and hit the deck running."

The result was that when technical appraisers from NASA's Langley Research Center and the Air Force came to award the first contract for *Project Mercury*—placing the first man in space—it went to the comparatively small (20,000 employees, among them 5,000 engineers) McDonnell company instead of one of the industrial giants among those 12 companies which bid.

In making the award announcement, Dr. T. Keith Glennan, NASA Administrator, said that McDonnell's proposal was accepted after a careful assessment of the technical value of the proposals, facilities, experience and other qualifications.

• \$15 million contract—The initial contract will be for a dozen satellite capsules (with equipment) and their subsystems—for \$15 million. This will probably be only a starter if the first few experiments prove successful. And it will, of course, include none of the cost of the booster, probably the Atlas, or for any of the ground handling equipment.

"This first capsule," McDonnell told m/r after the award, "will be what has become known as a conventional satellite." First passengers in the first few experimental flights will be animals, he said, with finally a man to be placed in space. The program, McDonnell said, will be "greatly accelerated" although he did not expect the first man up before at least two years. Who this first man will be, he said, will be NASA's problem, not McDonnell's.

The capsule (m/r, Nov. 10, p. 13) will be equipped for either water or earth landing, will have both drogue and landing 'chutes, a very sophisticated communications and control system, with the pilot having full command.

Collins Radio Co. will develop complete electronic instrumentation. Minneapolis-Honeywell will supply stabilizing and control systems.

It will have a high aerodynamic drag, non-lifting in type, designed to withstand any known combination of acceleration, heat loads and aerodynamic forces during boost or reentry. It will have a blunt leading face covered with a heat shield.

A closed loop control system consisting of an attitude sensor with reaction controls will maintain orbital attitude and establish the angle for retro-firing, reentry or abort.

Retrorockets for reentry can be fired by the pilot or from the ground. Emergency systems will allow escape in case of misfiring. Ground and booster equipment will determine the original orbit; both ground and capsule equipment will guide it thereafter. Communications equipment will include two-way voice radio, a command receiver and tracking telemetry. The orbit will be nearly circular, 100 to 150 miles up with a 24-hour lifetime.

NASA's project chief for Mercury will be Robert G. Gilruth. McDonnell's engineering manager of Mercury will be John F. Yardley, with E. F. Peters and G. F. Weber assisting for capsule design and equipment and electronics, respectively. Keeping a watchful eye over all will be L. M. "Mike" Weeks, chief of preliminary design engineering and Ray Tepping, assistant—and Jim McDonnell.

Congress Sees Urgency in Space-Missile Goals

Washington—The opening week of the 86th Congress was similar in mood to the post-Sputnik high-temperature sessions early last year. The heat generator this time was Lunik; heat conductor: next year's elections.

Ascent of Russia's man-made planet on the eve of Congress' opening set off demands for new approaches, more money and an investigation of space-defense policies. Recriminations against the Administration's attitude on this hot issue will get louder as the powerful Democratic majority goes into high gear.

The new chairman of the House Committee on Science and Astronautics said he would call for an immediate investigation to determine "where we stand" in the space race. Chairman Overton Brooks (D-La.) said that while he was not "being critical of anyone," the nation's space program must be conducted on an urgent basis.

 Change in signals—Proponents of bills which had been given slim chance of squeaking through this year were suddenly optimistic. Example: the measure introduced by Sen. Hubert I Humphrey (D-Minn.) to create a Dipartment of Science. Feeling had be that last year's crop of new agenciand councils should be given a chang to operate a year or two before at other agency was set up or any change were made. Supporters claim Lummay have given their cause a decisive shot in the arm.

Foes of the science department of the new Federal Council for Science and Technology made an additionagency unnecessary. But supporter pointed out that while the council aim is to "promote closer cooperationamong Federal agencies" in researce areas, it has no policy-making at thority.

• Crash program urged—Sei Henry M. Jackson (D-Wash.) urged crash program to snatch space leade ship from the Russians. He charge the Administration with a "business i usual" approach in a situation callin for "dramatic" action.

Jackson, a member of the powers Armed Services Committee, score penny-pinching in defense plannin "We are going to have to spend momoney," he declared. "There is no sulstitute for it."

Other Congressional critics have been similarly vocal about what the call the Administration's mania fine putting economy above defense need They will look for inadequacies in the proposed \$41-billion defense budg with fine-toothed combs.

Other proposed defense measure boosted by Lunik's impact include the bill by Sen. Leverett Saltonstall (I Mass.) calling for major military procurement changes involving weapor system management, easing of renegatiation inequities and liberalization is patent rights in the NASA Act.

-About the Cover-

Space means different things to different people and to these newsmen watching the blast-off at Cape Canaveral it means the tense, breathless moment when the countdown voice reaches the climax—"three, two, one."

There is the second of silence, the whoosh of flame and the unbelievable beauty of the slim, firetipped missile cleaving the black sky into space. This week's cover picture shows newsmen on the bleachers one mile from the firing pad at that moment. Above them newsreel cameramen are similarly poised, equally tense, muttering to each other the warning: "Don't move. Don't move. You'll shake the cameras."



Lockheed Space Station Interesting U.S. Agencies

Satellite laboratory could be in operation in 10 years; Cost estimate put at \$2.163 billion.

by Norman L. Baker

WASHINGTON—A Lockheed prosal to place a "permanent" manned tellite laboratory in operation within years reportedly is interesting govnment agencies.

Estimated cost of the station is .163 billion. This includes developent, construction, and launching, but es not allow for major breakthroughs the state of the art.

The necessary engineering knoww has been developed and hardware either available or under developent for an immediate start on a seris, coordinated program to put the poratory in orbit, Lockheed scientists

In a highly detailed report, based long months of study, Saunders B. amer and Richard A. Byers of Locked's Missile Systems Division prose a launching system, satellite velles and operational procedures in e with established engineering technues. The report was presented bete the American Astronautical Soty's fifth annual meeting.

Unlike many previous proposals, report makes no reference to plans designs far from the threshold of quisition. For example, throughout entire operation—from launch and embly of prefabricated components orbit to the transfer of personnel the completed station—the men uld be sheltered from the space vironment in cabins with simulated th conditions.

No clumsy, asphyxiating space suits h impracticable magnetic shoes are gested for "protecting" the satel-'s assembly and staff personnel. Krar and Byers say it is time for space gineers to forget such "science ficu" schemes except for emergency lipment. The outstanding feature of the system, assuring maximum personnel protection and working flexibility, is the "astrotug," a vehicle employed in the assembly of the space station. The cylindrical prepackaged compartments to be joined later to form the satellite would be launched separately and guided to a rendezvous point on the same orbit. "Astrotugs," with a crew of three, would then be used to round up, assemble, and activate the space station.

The men who assemble and staff the space station would travel into orbit aboard the "astrotugs" and earthspace taxis (re-entry vehicles). Return to orbit would be made aboard the reentry vehicles. All components would be launched in the nose of a basic threestage rocket with a recoverable first

• Concept philosophy—The multimanned satellite laboratory and space embarkation exploration platform could not be launched into orbit by a single vehicle using current propulsion systems. Hence, Kramer and Byers propose that the station be sent up in segments for attachment and integration later. Each section would be a self-sufficient unit. The first one would carry provisions to support several men for a number of months.

The sections would be prefabricated on the ground. Each would be a sealed compartment, with coupling devices and air locks at both ends. All would be self-sufficient to some extent, and most would be pressurized before going into orbit.

A number of sections would be launched and bunched together by ground control before men were placed in the orbit to complete the assembly.

Following the first group of sec-

tions, a small, multi-manned maneuverable satellite, the "astrotug," would be guided to the cluster. Operating like a railroad switch engine, the "astrotug" would collect and join the sections. It would carry supplies to maintain three men for seven days, time needed to assemble the first components.

A separate re-entry vehicle would follow the first tug into orbit to stand by while the initial group completes its task. Air locks on both tug and re-entry vehicle would permit transfer of men and materials. Each subsequent group of compartments and crew sent into orbit would have at least one re-entry vehicle placed into orbit with it.

 Orbit establishment—To insure maximum life of the satellite free from drag forces of the atmosphere, an orbit 500 miles out, below the radiation belt, is suggested as the minimum altitude.

The first, or pilot, compartment would carry a transponder to identify itself as the homing target. In addition to establishing a coordinate reference for positioning data for the other compartments, this unit would be equipped with ranging radar for determining the spacing of the compartments in orbit, a nitrogen propulsion system for controlling its attitude and orbit, and a computer-memory unit for computing corrections to maintain proper spacing of the compartments.

After the compartments went into orbit, a ground-controlled thrust maneuver would correct the actual orbit to coincide with the standard orbit.

With the pilot compartment established in orbit, three compartments would be launched in a salvo. The third stage of each rocket would home in on the pilot compartment for proper positioning. Collisions would be avoided by choosing a closing point

one or two miles from the pilot compartment.

Next, the first re-entry and "astrotug" vehicles would be sent aloft. The homing technique would be repeated with the manned vehicles free to maneuver after they reach the proper spacing.

The re-entry vehicle would be housed in the final stage of the three-stage rocket and fired into the 500-mile orbit in 6-10 minutes. During this phase of the operation the pilot would have no control except as a monitor or a back-up to the programmed flight path. In case of a malfunction, the ground control operator could override and take control of the automatic system.

The return trip is estimated at two to four hours, based on the "g" limitations of personnel and the maximum temperatures which the structure could endure. Re-entry attitude would be critical and Kramer and Byers doubt that an inertial system can retain its reference axes to the degree necessary for re-entry over the period it will be in orbit.

They propose a satellite control reference platform that would establish coordinates with respect to the local vertical and orbital plane and feed its output continuously to the caged stable

platform in an autopilot. Integrating accelerometers would be fixed to the vehicle structure to measure and integrate accelerations along each of the three vehicle axes.

• Re-entry maneuver—In returning to earth, retro-thrus! applied to the vehicle would enable it to descend on transfer ellipse. The control platform would give continuous attitude, altitude, and velocity data to the pilot display and autopilot stable platform.

Turbojets started as the vehicle entered the subsonic would supply thrust for subsonic flight to rendezvous with a mother airplane. The pilot could override the automatic control system for landing aboard the mother airplane or for emergency landing.

• "Astrotug" operation—In the course of the "astrotug's" operation as the assembly vehicle, its crew would be charged with locating, identifying, capturing, and returning to the assembly point each of the 23 compartments in the sequence required for assembly.

Kramer and Byers estimate that maximum dispersion, by the time the first "astrotug" arrived, would be held down to a few miles.

With the pilot compartment fixing the position of station assembly, the "astrotug" would acquire the second compartment on its radar or infrared search equipment. Using its navigation computer, the "astrotug" would travel to the compartment, return it to the assembly point, and join it to the first compartment. The coded transponder aboard each compartment would provide identification for order of assembly.


• Re-entry vehicle design—The reentry vehicle would be an outgrowth of an advanced delta-winged airplane combining the features of a hypersonic glider and a subsonic powered aircraft.

Pilot observation would be through a windshield protected during re-entry by hinged thermal doors. A full circular horizon scanner would provide optical orientation while in orbit.

Power for orbit maneuvering would be provided by "throttleable" rocket engines. Using fluorine and hydrazine as propellants, the engines would have a thrust of 200 pounds.

Two solid propellant rockets with a total thrust of 18,000 pounds and a burning time of 20 seconds would initiate re-entry. For flexibility in the recovery operation, the vehicle would be equipped with a jet engine system yielding a 100-mile range.

Basic re-entry features of the system are predicated on the establish (Continued on page 32)

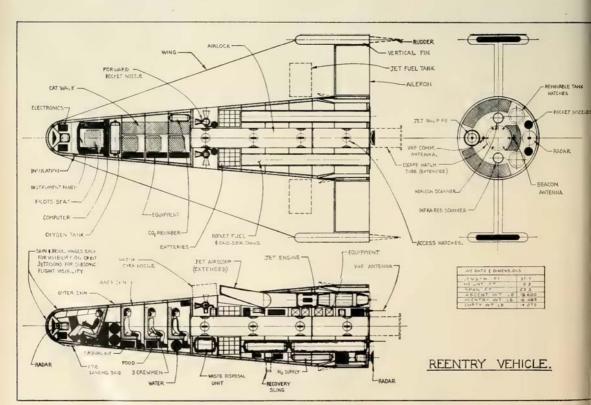


REENTRY VEHICLE for Lockheed-proposed space station could carry crew of four.

astronautics in the news ...

ANORAMIC VIEW of weather proditions is shown in this comsite of five photographs taken a camera rocket fired from allops Island, Va. Photographs ken from an altitude of 86 iles, show an area of 1000 iles extending, left, from Nova otia to hundreds of miles uth of Bermuda. Cameras opated at shutter speeds of 2000 of a second.



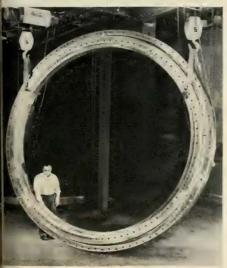

THIS BALL bearing made by Kaydon Engineering Corp. is 13 feet 9 inches in diameter. Designed for the Nike-Zeus radar system, it will hold weight of one-million pounds.

FIRST ROCKET engine nozzle for the Kiwi-A (Project Rover) atomic engine system undergoes static firing test at Rocketdyne with conventional propellants before being shipped to the Los Alamos Scientific Laboratory.





Polaris ROCKET MOTOR casing part being machined by Diversey Engineering Co. for Aerojet-General Corp., propulsion system prime contractor for the fleet ballistic missile. Of large diameter by present-day standards, it still is not big compared to some of the solid propellant motors now in the works, such as Minuteman where Aerojet shares propulsion development position with Thiokol Chemical, Allegany Ballistics Lab. and Grand Central Rocket Co. Parts are machined from very high-strength steel alloys and must be finished to extremely high tolerances.

missile electronics

Gyro Drift Demanding New Measurement Techniques

by Ralph Hookway
Electronics Department,
The Martin Company

BALTIMORE—With the newer longrange missiles requiring more exacting drift rates for gyros in inertial systems, industry today is faced with the task of providing new measurement techniques

to keep pace with developments.

In pre-missile days when gyros were widely used in short-range blindflying devices, they could drift as much as five degrees an hour and still do

GYRO MUST be mounted on rigid and precise turntable.

newer missiles, demanding a rate of less than 0.05 degrees an hour, brin new requirement standards.

This article will summarize dril measuring techniques for systems use in the TM-76 Mace which has a fairly standard than a fairly standard to the systems.

their job satisfactorily. But today


in the TM-76 Mace which has a fairl long flight time in an acceleration et vironment of essentially lg. Ballist missile systems which experience hig accelerations for short flight-time priods, will not be considered.

• Drift causes—By definition, dri rate is that angular velocity about the system of the transfer of


• Drift causes—By definition, dri rate is that angular velocity about the input axis (with respect to inerthis space) which is necessary to keep the gyro output signal constant (near zerowhen no signal current is applied that the torquer. It results from design limitations and imperfections in manufature, such as very small, residual in balances which produce a torque which in turn, generates a drift rate.


Stray torques are also introduce by the electrical lead-ins to the flowering friction, and the self-induced magnetic fields at the pick-off at torquer. In typical inertial instrument the torque producing the characterist drift rate is very small. For example a gyro with an angular momentum 10⁵ gr-cm²/sec when subjected to torque of only 0.02 gr-cm²/sec² deplays a drift rate of 0.05 deg/hr. a 1 cm arm, this torque is produced by a mass of only 2.47 x 10⁻⁵ grams

Since the torques are so small a can be measured only with the gy completely assembled, a technique been developed which, in effect, us the assembled gyro to test itself. Stat

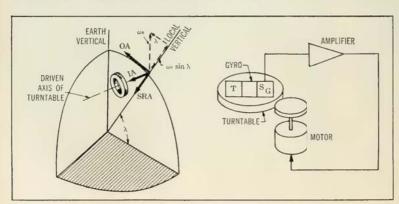

TURNTABLE-MOUNTED gyro is used to measure total drift rate U1 in Mace.





DIAGRAMS 2 (left) and 3 (right) determine drift rates U, and U,

New electronics frontiers

Advanced systems research, to meet the demands of complex modern weapons systems, is among the many new activities that attract engineers and scientists to IBM. This research encompasses over-all planning of methods for the detection of flying objects . . . feasibility studies of guidance, detection and defensive systems . . . specification of radically new equipment for terrestrial and stellar navigational problems. Academic studies of logistics, operations research, information and communications theory are also part of this new research at our Kingston facility.

A CAREER WITH IBM. A recognized leader in the electronic systems field, we present unusual opportunities for technical achievement and professional advancement. With a secure position in commercial sales, IBM offers stability, liberal company benefits, company-paid relocation expenses and advancement on merit. Salaries are commensurate with ability and experience.

KINGSTON, N. Y., is a pleasant Hudson River valley community. It combines country living with easy proximity to New York and other metropolitan areas.





open in these development areas:

- Cryogenics
- Digital Computer Design and Programming
- Guidance and Detection Systems Analysis
- Low-Temperature Physics
- Magnetic Devices
- Optical Systems for Data Presentation
- Solid-State Physics


QUALIFICATIONS: B.S., M.S., or Ph.D. Degrees in Electrical Engineering, Physics, Mathematics or related disciplines. Industrial experience is desirable.

Write, outlining qualifications and experience, to:

Mr. D. H. Hammers, Dept. 604A **IBM** Corporation Military Products Division Kingston, N. Y.

IBM MILITARY PRODUCTS



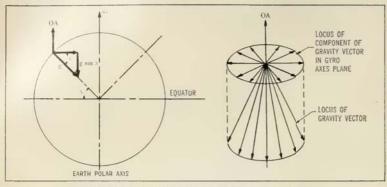

LOCUS OF GRAVITY vector relative to gyro axes.

inputs are earth's rotation and gravitational field.

Total drift rate includes a gravity-sensitive component (gravity-caused deflections of the gyro structure which introduce stray torques) and a non-gravity-sensitive component which accounts for all other torques. To fix the maximum value of the gravity-sensitive component (important in the calibration of guidance systems), a method must be devised to separate the non-g-sensitive component from the total measured drift rate.

• Test formula—One technique is to measure the two components separately, apply a correction to remove apparent drift due to the vertical component of earth rate at the latitude of the test site, and then calculate the maximum gravity-sensitive drift rate from the relation:

 $(Ug)^2 \max = (U_1 - U_3)^2 + (U_2 - U_3 - W_0 \sin \lambda)^2$ (1) where (Ug) max = maximum gravity-sensitive drift

U₁ = total drift rate measured with SRA vertical and OA oriented north-

 U_2 = total drift rate measured with IA vertical and OA oriented north-south U_3 = non-g-sensitive component measured with OA vertical and SRA oriented north-south

 W_e = earth's angular rate λ = latitude of the test site.

From the geometry of U₁, U₂, U₃, (Diagrams 2 and 3), some requirements of test accessories can be deduced. The gyro must be mounted on a very rigid and precisely built turntable (see photo). High-precision optics are needed to measure table rotation to within a few seconds of arc. Since tests usually take several hours, there should be a means of simultaneously recording table position and accurate time base.

Total drift rate U, is measured by

mounting the gyro on the turntable as shown in Diagram 1. The input axis is parallel to the driven axis of the table, which is horizontal and pointed eastwest. When rotated about its output (turntable) axis so that the spin reference axis is vertical, the gyro does not see any component of earth's rate. A servo loop is then formed by using the gyro pickoff signal to drive the turntable as shown in the right of Diagram 1.

The table is driven at a rate which just keeps the gyro output nulled. This rate is a direct measure of gyro drift rate for the orientation under test.

Total drift rate U_2 is determined with the gyro mounted on the same turntable with turntable and gyro input axes coinciding parallel to the local vertical as shown in Diagram 2. As before, OA is aligned north-south. In this orientation, there is an apparent drift rate arising from the vertical component of W_0 which lies along the gyro input axis in addition to the drift rate resulting from structural deflections. This component of earth rate has the magnitude of:

 $W_{ev} = W_{e} \sin$

This relation shows that the better the gyro the more accurately the latitude of the test site must be known.

• Exact location—To keep errors small relative to the drift rates being measured, the test site location should be known so accurately that the vertical component of earth rate is no greater than about 1/10 of the expected drift rates. The following shows typical values of the survey accuracies required for various classes of gyros:


Autopilot directional gyros:

Typical Drift Rate
1 to 10 deg/hr

Directional gyros for polar navigation:

Typical Drift Rate
0.5° to 5°

Allowable Site Error
Allowable Site Error
3 min to 30 min



ALINEMENT of gyro axes in Mac-

Inertial navigator gyros:

Typical Drift Rate Allowable Site Erro 0.001 to .1 2 sec to 3 mi

It is now possible to define U₃ if the drift rate measured by orienting the gyro so that its OA is vertical, SR horizontal and pointed north-south. If and the driven axis of the test turntab are horizontal, pointing east-west shown in Diagram 3. The local gravity-induced torques are applie Nor is there a component of earth rate of account for.

From this testing procedure, A get the maximum drift rate to despected from a gyro in an lg gravit tional field regardless of its orientation. While a measure of gyro quality, the data is not directly useful in properties of the process of the pr

ertial system is of the geometric typhowever. Here the gyro reference fixed in inertial space at the laun point vertical while accelerometrack the local vertical throughout thigh to indicate the earth central any between launch point and present pction. Distance traveled over the surface of the earth is easily obtained.

In general, orientation of the logravity vector relative to the gyro a varies during flight. Since the gy drift rate varies with the orientation gravity, to achieve the utmost accum from the guidance system the d measured should be corrected for s sitivity of the gyro to gravity oriention. Gyro coefficients to be used data inserts in the guidance system obtained by tumbling tests.

The same type of test table (pho

s used. One of the gyro axes (and the able axis of rotation), however, is ligned parallel to the polar axis of the arth. Under these conditions the locus f the gravity vector relative to the vro axes is as shown in Diagram 4. wo minor effects, which can be nelected, are the 365-day cycle of the arth about the sun, and the change f earth's gravity due to the motion f the moon in its 29-day orbit.

The gyro axes can be aligned as nown in Diagram 5 and the gyro pickff signal can be used to drive the table nd hence the gyro pickoff to null. This rocedure fixes the gyro in inertial sace while a component of the gravity ector rotates in the plane defined by

e output and spin axes.

Results of this test can indicate the erformance of a geometric inertial idance system. Total angular motion ported by the gyro in a given time riod is compared with the actual igular motion of the earth in the same ne. The difference is due to the drift te of the gyro, which is reflected in stem performance at the rate of 1 in of difference after an hour long st run for 1 mi of error in navigation ter one hour's flying.

Another type of tumbling test can performed with the gyro output axis rallel to the earth's polar axis and e test turntable axis. The gyro is aged" by using the signal pickoff to ive the gyro torquer (after proper aplification). The test table is rotated some multiple of earth rate, but this tation is not seen by the gyro since component of it appears along the ro input axis. Recording the torquer rrent as the orientation of gravity ries varies gives a measure of gyro

Ilin Telemetering Intract is for \$500,000

PRINCETON, N.J.-A contract of bre than \$500,000 for supplying ee telemetering ground-station sysns for the Eglin Gulf Test Range, h., has been awarded of tories to Applied Science Corp. of ., has been awarded by ITT lab-

The project calls for a 300-mile ctronic "scoreboard" for testing miss and aircraft, including Bomarc. e ground station equipment will be d at three separate range sites for eiving, reducing and recording teletered flight-test data.

Each systm will contain FM/FM, M and PW equipment, simultaously handling data signals from ee aircraft or missiles and from three nes. Each aircraft or missile will able to transmit to each site four tinuous data channels and up to 90

channels of time-division commutated data. Each drone will be able to transmit to each site four continuous data channels.

A central control section will provide flexible patching facilities for programming ground station equipment allocation to meet the requirements of the test range.

Thermoelectric Generators Have 6% Efficiency

St. Paul, Minn.—Thermoelectric generators with an operating efficiency of about six per cent have been developed by Minnesota Mining and Manufacturing Co. The generators use heat applied to semi-conducting materials.

The company has been in pilot plant production of semi-conductor elements and sub-assemblies for more than a year, a spokesman said, and now has adapted the material to com-

plete, operative generators.

One of the generators is a five-watt unit about the size of a quart fruit jar, which reportedly operates at six per cent efficiency and is intended for use with an isotope heat source. This unit is designed to be cooled by air.

Similar units are being designed for cooling with water or by radiation, the company said. Additional generator types are to be built this year.

Standard Navigation Aids Could Guide Space Travel

COLUMBUS-Even though chances of hitting a planet with a ballistic shot are slim, a manned space vehicle capable of in-flight corrections could reach a planet with existing navigation equipment.

Arthur S. Cosler Jr., executive director of Ohio State University's Mapping and Charting Research Laboratory, who made the statement, emphasized that the vehicle would have to be powerful enough to carry such instrumentation.

The University is conducting research on navigation techniques for interplanetary space flight on an Air Force contract granted to its research foundation. The objective of the project is to examine all potential sources of space navigation information.

Some of the possibilities being considered include: taking bearings on planets; sending out radar signals from an earth-fixed station or from a satellite; using charts of the intensities of electron or ion clouds in space, or maps of magnetic field strength and direction space. One conclusion already reached is that a space vehicle would need to alter course during flight to Beattie-Coleman built 100 g's into the **MPR-13**

Programer

g

g

g

g

g

g

g

g Resistance to high shock loads is just one of the amazing g pluses of the g Beattie-Coleman MPR-13 punched Mylar tape g Programer. The MPR-13 g is the accepted g standard for g multi-channel programming because of its compatibility g with most missile guidance systems . . . and performs with an accuracy of one part in 50,000 under these high "g" loads! Programs can be initiated or altered in a few minutes with millisecond precision for either repeat cycling or random operations.

> The rugged Beattie-Coleman MPR-13 Pro-gramer weighs 3 lbs. 10 ounces, is 2"x 3"x 6". More information is available on request.





1000 N. Olive St., Anaheim, California

COUNT DOWN for the conquest of space



ROCKETDYNE ENGINEERS HAVE MADE MORE THAN 50 TRIPS TO THE NEIGHBORING PLANETS

Through the ship's viewing port looms a breathtaking sight—a gigantic red crescent spanning some 30° of deep black sky. A television camera, passenger on this strange new chariot, stares intently at a sight never before seen by man and beams home to Earth his first crude view of the planet Mars.

From dream to drafting board

Less than a decade will pass before this age-old dream of man is realized. Bold steps toward such an exploration of Space are underway now. An experimental ion rocket engine will soon be placed in operation at Rocketdyne's Propulsion Field Laboratory in the Santa Susana mountains. From this research tool will come design data for the efficient, low-thrust freight engines for Outer Space. These engines will be capable of operating for months at a time, and will make pos-

sible extended reconnaissance of the Solar System and cetailed studies of the phenomena of Space.

But what of the journey itself?

Rocketdyne engineers have made more than 50 trips to the neighboring planets on huge computer machines. In these paper trips, they have studied the gravitational effects of as many as seven planets at a time. By watching closely the effects of such forces on their low-thrust ionvehicle they determined thrust programs to reach various planetary objectives. They showed the trip to Mars could be made with thrust to vehicle-weight ratics as low as 1 to 10,000.

Testing in Space conditions

Rocketdyne has been at work on ion rocket engines since 1955. While many difficult design problems yet need to be solved, extensive new facilities and three years of exhaustive studies are being applied to the job. Rocketdyne scientists will operate their experimental ion engine in simulated space conditions to unlock important answers to thrust chamber design, power conversion systems, nuclear heal sources, and propellants.

Hardware for defense and science

Today the operating hardware in the field of high-thrust rocket engines is designed and built by Rocketdyne; propulsion systems for the Air Force's Atlas and Thor, and the Army's Red stone and Jupiter... and for scientific missions such as the Explorer satellites and the NASA space probes conducted by the Air Force and Army Based on this unequalled experience. Rocketdyne is already probing far into the future. Engineers are already at



PROBING TOWARD THE PLANETS
Heaved bodily into Space by the
Rocketdyne-powered Thor fire
stage, the Pioneer starts on it
80,000 mile sortie toward the moon

work on the next and succeeding generations of high-thrust rockets, and high-specific-impulse engines to supplement chemical rocket performance

FIRST WITH POWER FOR OUTER SPACE

ROCKETDYNE IZ

A DIVISION OF NORTH AMERICAN AVIATION, INC.

. . missile electronics

rrect for navigational and ballistic

• Loss unlikely—Cosler said there as little chance of a manned rocket coming lost in outer space even with e standard navigation aids now availle, provided the vehicle could mane to carry them all. The navigation is are necessary, he explained, beuse a prime difficulty in intercepting e moon or a planet with a ballistic ot is man's inexact knowledge about e true distances in space. He said lculations of interplanetary distance e based on a distance from the earth the sun which carries a margin of ror of several thousand miles.

On another point, Cosler said that uch more must be learned about how an will function in space before scitists can decide what navigation uipment must be automatic.

mphenol and Borg Firms erge Electronics Output

CHICAGO—Two major Midwestern extronics firms, Amphenol Electronics orp. and the George W. Borg Corp., ve merged into Amphenol/Borg Electronics Corp., with combined assets of pre than \$37 million.

Arthur J. Schmitt, Amphenol's present, is chairman of the board and esident of the new company and eorge W. Borg, chairman of the Wisnisn firm, is chairman of the execute committee.

The consolidation was approved by ckholders of both companies in eetings held Dec. 30. It was effective ec. 31.

The merged companies, with headarters here, will have total floor ace of a little more than 1 million uare feet when Amphenol's new Chigo plant is finished. The figure exudes divisional plants in Connecticut d California.

Amphenol is a major supplier of nnectors, cables and other electronic mponents for missiles. Borg proces precision potentiometers, direct ading counting dials and electronic struments.

CA Adds Space For Its rowing Missile Business

Radio Corporation of America has used a two-story brick building at oydon, Pa., to provide space for its panding military business.

The new plant, containing 74,000 uare feet of floor space, is situated about seven acres of land 20 miles

northeast of central Philadelphia.

The new facility, combining oneand two-story construction, will be under the jurisdiction of RCA's Missile and Surface Radar Dept., Moorestown, N.J., and will provide supplementary space for rapidly expanding activities at that location.

missile people

Dr. Patrick Conley has been appointed manager of the Westinghouse Electric Corp.'s Air Arm Div. Dr. Conley, technical director on the Defense Products Group headquarters staff, succeeds Dr. S. W. Herwald, former manager of the Air Arm Division, who was recently named vice-president for research.

Rep. Overton Brooks (D-La.), slated to head the House Science and Astronautics Committee is known as a "progressive Southern Democrat." Long a member of the House Armed Services Committee, where he is second-ranking member, Brooks is highly respected by Defense Department officials who come to committee hearings well-prepared for his searching questions. It is expected he will leave the Armed Service Committee.

Dr. Siegfried J. Gerathewohl, authority on weightlessness and a contributor to m/r, has joined the Von Braun team at the Army Ballistic Missile Agency. He will work under Dr. Ernst Stuhlinger, ABMA's director of the Research Projects Laboratory. Dr. Gerathewohl left the School of Aviation Medicine where he has conducted experiments on the effects of weightlessness in space flight after coming to this country from Germany 11 years ago.

Henry E. Billingsley has been appointed director of the Office of International Cooperation of the National Aeronautics and Space Administration. He was formerly chief of the Western European Division in the Defense Department's Office of Internal Security

George M. Bunker, president and chairman of the board of the Martin Co., has been elected to Bulova's board of directors.

Dr. Allen E. Puckett has been named a vice-president and director of the systems development laboratories of Hughes Aircraft Co. Lawrence A. Hyland, vice-president in charge of engineering, has been appointed vice-president in charge of systems management. Dr. Nathan I. Hall, vice-president and director of systems development laboratories, has been named to fill Shank's former post.



Help us solve the problems of

ION PROPULSION

Our Advanced Design Group is seeking engineers and scientists to work on low-thrust propulsion systems that will make possible the manned exploration of Outer Space. These are a few of the challenging positions:

Theoretical Physicist

Experienced in the field of particles physics, magneto-hydro dynamics, and plasma physics comparative performance of electrical propulsion systems, new methods of developing thrust from electrical propulsion systems, and direct conversion processes.

Chemical Physicists

To make studies on propellants for ion propulsion. Experienced in electronics, atomic physics, and physical chemistry.

Physicists

Primary activities will be in the field of ion sources and high vacuum techniques. Experienced in particle accelerators, ion sources, and electronics.

Electrical Engineer

Analysis of electrical power generators, preliminary stages designs of permanent magnet, AC induction and electrostatic generators.

Please write: Mr. D. A. Jamieson, Engineering Personnel Dept., 6633 Canoga Avenue, Canoga Park, Calif.


ROCKETDYNE TE

A DIVISION OF NORTH AMERICAN AVIATION, INC.







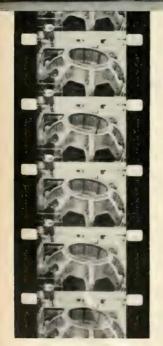

"Shaker"-Loewy's giant rocking horsepaves way for ballistic missile firing at sea

The giant ship motion simulator called "Shaker" has come to life. Designed and built by Loewy-Hydropress under prime contract with the U.S. Navy for its Fleet Ballistic Missile Program, the 40-ft.-tall rocking horse moves up and down, fore, aft and athwart under the electronic fingertips of a distant operator in a thick-walled concrete blockhouse.

"Berthed" at Cape Canaveral not more than 800 feet from the beach and nested in a 47-ft.-deep pit, "Shaker" performs all the important movements of a seagoing vessel. Sliding up and down, she imitates the vertical heave motion. Tilting port and starboard, she acts out rolling. Rocking forward and backward, she duplicates pitching. An intricate mechanism of giant gyrating joints makes these rock 'n' roll moves and their innumerable combinations possible. By proper setting, the typical behavior of an oceangoing vessel in seas ranging from calm to stormy can be recreated precisely by "Shaker."

Polaris, the Navy's Fleet Ballistic Missile, will soon be tested on "Shaker." For creative engineering and design, research and development in your defense and industrial contracts, direct your inquiries to us at Dept. 8-1.

Loewy-Hydropress Division

BALDWIN · LIMA · HAMILTON

space age

by Norman L. Baker



Charting Lunik's orbit—The tenth "planet" of the solar system (actually a man-made planetoid or asteroid) reached its perihelion of 91.5 million miles about Jan. 14 and began its decelerating swing out and around the sun. About one million miles from the earth at its closest approach to the sun, it is slowly being overtaken by the earth at the rate of about .181 degrees a day.

After earth and Lunik reach conjunction (possibly sometime this month) the earth will rapidly pull ahead of the Russian probe, overtaking it again in roughly 5.43 years. Sometime in early 1964 Lunik will make its first close approach to the earth. Even then the distance will be far beyond the earth's gravitational attraction.

Estimated planetary data—Lunik—or Mechta (dream), as the Soviets later tagged it—left the earth with a burnout velocity of 25.7 miles per second (in relation to the sun). At its closest approach to the moon (4,660 miles), its velocity had been reduced to 20 miles per second. As the probe moved away from the earth-moon field the sun's attraction upped the velocity to 20.1 miles per second at the perihelion. By the time it reaches its aphelion of 123.25 million miles on Sept. 9, its orbital speed will be reduced to 15.1 miles per second and it will be more than 33 million miles from the earth. This will put Lunik within 5-6 million miles of the closest approach of Mars' orbit to the earth's orbit (Mars at that time will be tailing Lunik by about 145 degrees).

Moon impact attempted—There's increasing evidence that Soviet scientists attempted to send their payload into an intercept with the moon. The earliest Tass announcement of Lunik's estimated arrival time to the vicinity of the moon was three hours later than the actual time of arrival. The moon moves about the earth approximately one diameter every hour (orbital velocity: 2287 mph, diameter: 2160 miles)—in three hours the moon would have traveled 6861 miles.

Lunik led the aft side of the moon by 6820 miles, indicating (based on the average orbital velocity of the moon with a miss of only 41 miles) the Soviet scientists had definitely planned to impact the lunar surface. A later Russian announcement admitted the rocket vehicle attained a greater velocity than had been desired.

The fact is that an artificial asteroid can be put into orbit around the sun by simply launching it in any direction and at any velocity greater than the escape velocity of the earth-moon system. Giving Lunik a short lifetime (62 hours) radio power system when solar power could have been supplied (Sputnik III was so equipped) does not seem reasonable if an orbit of the sun had been planned as the major objective.

Space flight capabilities—The RAND Corp., in a scientific analysis for the Select Committee on Astronautics and Space Exploration, outlined what could be done with U.S. ballistic missiles in five years or less. Using adaptations of basic IRBM and ICBM hardware, the report said, would permit the following experiments:

- 1) Orbit satellite payloads of 100-10,000 pounds at 300 miles altitude.
- 2) Orbit satellite payloads of 25-2500 pounds at 22,000 miles.
- 3) Impact 50-3000 pounds on the moon.
- 4) Land, intact, 10-1000 pounds of instruments on the moon.
- Land, intact, more than 1000 pounds of instruments on Venus or Mars.
- 6) Place a 1000-lb. instrument probe in the atmosphere of Jupiter.
- 7) Launch and return men from orbit around the earth.

Avoid false test results with GLENNITE internally ungrounded accelerometers



Now you can avoid one of the major causes of false test results - spurious "ground loop" voltages - by using internally ungrounded CLENNITE accelerometers.

These units contain sensitive seismic elements internally insulated from the mounting stud by rugged ceramic insulation. You can employ a single point ground at the data handling or recording equipment by using a combination of these accelerometers with ungrounded GLENNITE amplifiers and filters.

GLENNITE accelerometers are available in uni- and triaxial models — wide acceleration and temperature ranges.

A complete line of associated ungrounded electronic equipment includes filters, amplifiers, connectors and other related units.

For complete data on Gulton instrumentation systems — grounded or ungrounded — contact your local Gulton representative or write us direct.

Call in Gulton

From transducer to readout, Gulton is capable of meeting all your instrumentation needs. If you have a measurement problem, why not call in a Gulton Instrumentation Engineer. His broad experience in shock and vibration measurement can prove invaluable to you.

GULTON INSTRUMENTATION DIVISION



Gulton Industries, Inc.

Metuchen, New Jersey



reliable couplings unlimited

Thousands of Janitrol couplings for high-temperature high-pressure ductwork are proving their reliability on advanced aircraft and missiles: DC-8, 720, 880, 707, KC 135, CF 105 (Mark I and II), F4H, F8U3, P6M, S-55, HR-251, H19D4 H34A, H37A, Regulus II and the Green Quail.

Couplings are furnished in titanium as well as stainless steel; sizes range from 1" to 36" diameter. Janitrol coupling reliability is firmly based on a unique combination of research, design, testing and manufacturing facilities capable to handle complete systems including heat exchangers, coolers, and controls.

Call the Janitrol representative near you for help early in the design stage.

Janitrol Aircraft Division Surface Combustion Corporation 4200 Surface Road Columbus 4, Ohio







astrionics

by Raymond M. Nolan

Latest entry in the lightweight inertial guidance field is Nortronics' LINS (Lightweight Inertial Navigation System). Starting with a design objective of 35 lbs. for the platform, Nortronics engineers came up with a 30 lb. package. The platform uses the Minneapolis-Honeywell MIG (miniature integrating gyro) gyros and Nortronics-designed digital accelerometers. All preamplifiers and some of the accelerometer electronics are enclosed on the platform. The unit operates at 130°F ambient with integral heaters taking the MIG up to its operating temperature of 180°F. The remainder of the system is packaged in two boxes—one for digital circuitry and one for analog circuitry.

Power for the system is straight 400-cycle because the design was for a Century series lightweight fighter. However, company engineers feel that they can accept the battery input which would be required for missile applications with more ease than the 400-cycle.

A DOD official recently threw a little cold water on the Sperry SINS (Shipboard Inertial Navigation System) now being checked out on the USS Compass Island and planned for use on *Polaris* submarines. The complaint isn't with the equipment itself, which reportedly easily operates to specifications, but with the requirements that some people are talking about in DOD. According to reports, there is some feeling now that SINS should operate with no appreciable drift for about 30 days. This is a considerably greater time than the equipment is designed for.

However, some people in industry say that this isn't a worry. Their solution is a high-speed stellar corrector which would adjust the inertial system in the first few minutes after *Polaris* leaves the water. This would eliminate, they say, the requirement for long-range, ultra-precise navigation equipment with an almost impossible to attain remembering capability. Whether or not these objections and solutions have filtered back to the Special Projects section of BuOrd or to Lockheed is not known.

Competition for the successor to the Aerophysics Dart continues hot with reports that a demonstration of the French SS-11 was recently held by the Marines at Quantico and that licensing rights for the German Kobra have been picked up by a U.S. manufacturer. This makes three contenders for succession rights, all foreign. In addition, the English Vickers type 891 has been licensed for manufacture in this country and is rumored to be under evaluation now. The Vickers missile has been officially named the Vigilante by Vickers-Armstrong. This goes along with V-A practice to tab all their products with names beginning with V.

The SS-11 demonstration was labeled by some observers as a limited success and by others a dismal failure. At any rate, the French had several failures, including one for wire breakage and another which would not leave the helicopter-borne launcher. However, the few missiles that did operate without malfunction were on target.

Whatever the outcome, the U.S. will be getting a bargain in the wireguided, anti-tank missile it chooses since all three are essentially fully developed. Some minor redesign might be necessary to comply with military specs, but manufacturers and importers of the missiles are keeping their fingers crossed since they are in general agreement that too much tinkering around was what really killed the *Dart*.

525° F plus internal ungrounding



You get both in this Glennite® piezoelectric accelerometer

Now, for the first time, you can have extremely high temperature range plus the advantage of internal ungrounding.

Heretofore supplied grounded, the AXT321 is now available for applications where "ground loops" must be avoided.

The new ungrounded AXT321TMU, developed for use in extreme environments, can be operated continuously without temperature compensation.

It has excellent accuracy and reliability, high resonant frequency, small size, light weight.

A complete line of associated equipment is available including filters, amplifiers, connectors and other related items.

For complete data, call your local Gulton representative or write us direct.

Acceleration Range: 0.1 to 300 g

Frequency Range

at room temperature: 3 to 3000 cps at +525°F: 10 to 3000 cps

Resonant Frequency:

10,000 cps

Capacitance:

500 μμf

Temperature Ranges: Sensitivity: -100° F. + 525°F

Weight (Approx.):

5 mv/g min. 5.5 grams

Call In Gulton

From transducer to readout, Gulton is capable of meeting all your instrumentation needs. If you have a measurement problem, call in a Gulton Instrumentation Engineer. His broad experience in shock and vibration measurement can prove invaluable to you.

GULTON INSTRUMENTATION DIVISION



Gulton Industries, Inc.

Metuchen, New Jersey

In Canada: Titania Electric Corp. of Canada, Ltd.
Gananoque, Ontario

Includes chemical, manufacturing and performance details ...

ROCKET **PROPELLANTS**

by FRANCIS A. WARREN

Manager, Special Projects Section, Department of Chemistry. Southwest Research Institute



1958, 228 pages, \$6.50

The purpose of this book is to provide technical men with basic information on the materials being used to propel the rockets and missiles of today, and to recount in an objective manner the fascinating story of rocket fuel development.

It contains the composition, manufacturing methods, and performance details of both solid- and liquid-propellants used in rockets, from small signal units to the largest missiles currently being launched. The book also includes chapters on propellant burning, ignition and igniters, and the various rockets that use each kind of fuel. There is comprehensive information on safety in the propellant manufacturing plant, and quality control of the product.

A final section looks to the future of

the present fuels, and reviews the theories that may lead to new ones, such as ion and photon propulsion, and antigravity.

CONTENTS: Propellant Systems; Propellant Ingredients; Solid-Propellant Manufacture and Processing; General Performance Characteristics; The Burning of Propellants; Ignition and Igniters; Solid-Propellant Rockets; Liquid-Propellant Rockets; Safety; Evaluation and Quality Control; The Future of Propellants.

Free Examination Order Form MAIL THIS COUPON TODAY!

REINHOLD PUBLISHING	COPPORATION
Dept. M-384, 430 Park Av	ve
New York 22, N. Y.	

Please send me ROCKET PRO-PELLANTS to read and examine. In 10 days I will return the book and owe nothing, or I will remit \$6.50, plus postage.

N	A	N.	IE.	-	
A	D	D	RE	S	S

ZONE STATE

SAVE MONEY! Enclose payment with order and Reinhold pays all shipping costs. Same return privilege, retund guaranteed. Please add 3% sales tax on N.Y.C. orders. Do Not Enclose Cash!

. . . space station

(Continued from page 20)

ment of radiation equilibrium conditions. Kramer and Byers emphasize that these conditions are being studied intensively under Dyna-Soar and problems encountered in designing the reentry vehicle should be similar to those of the boost-glide vehicle.

· "Astrotug" design-The workhorse in the satellite construction would consist of two double-walled pressure vessels 10 feet in outside diameter, 9 feet inside, 20 feet long, and weighing over 20,000 pounds fully loaded. The vessels would include compartments for the crew, and mounting surfaces for external equipment such as radar, antennas, and search lights.

Propellants for the rocket would be the hypergolic combination of fluorine and hydrazine to ensure reliable ignition in a vacuum.

 Booster rocket system-The three-stage boster rocket would be 180 feet long, with a base diameter of 18 feet and a first-stage fin span of 52 feet. The fins would stabilize the first stage during ascent, and act as lifting surfaces during recovery. Four turbojet engines mounted on the aft section of the first stage would supply supplemental power during launch and susstainer power for the return to base of the expended stage.

Launch gross weight of the booster would be approximately 300 tons with a payload weight of 20,000 pounds.

The engine for the first-stage system would be a 1.16 million-pound thrust unit operating at a chamber pressure of 600 psi. Kramer and Byers selected a "plugged-nozzle" being developed by General Electric. Burning time for the engine would be 90 seconds.

The second-stage propulsion system would have a 321,000-pound thrust engine burning a hydrogen-fluorine combination for 200 seconds. Thirdstage engine would be similar to second-stage with a thrust of 76,000 pounds for 175 seconds.

 System schedule—Kramer and Byers say success in the space-station development will depend on information to be supplied by four major programs. These are the X-15 probes extending into 1964, Man-in-Space orbiters, 1960-65, Dyna-Soar, 1961-66, and a minimum space station (one or two men), 1962-67.

Answers supplied by these programs should, according to the Lockheed scientists, be sufficient for initiating an orbit rendezvous development. The multi-manned scientific space station would be possible by early 1964, with an operational station by 1968.

MISSILE ENGINEERING

The "collapsing of time" concept has taken on added significance as a result of the current international situation. In Tucson, Arizona, Hughes has established the Tucson Engineering Laboratory for the purpose of shortening the elapsed time between missile development and its effective tactical use. This activity, established over 2 years ago, has proven that the quasi-simultaneous development and production of missiles can become a feasible reality.

The Tucson Engineering Laboratory is now expanding its scope of operations. Mechanical Engineers, Electrical Engineers, or Physicists who like to work on urgent problems and who have the ability and enthusiasm to constantly improve the product and its reliability, will find this an ideal environment. Specific areas of interest include: missile system analysis, infrared and radar guidance systems electromechanical and hydraulic con trol systems, missile and test equip ment and electronic circuit design.

An added advantage: Tucson's dri healthful climate. Investigate by sending resume to Mr. W. A. Barnes

the West's leader in advanced electronics

HUGHES

TUCKON ENGINEERING LABORATORIES

> Hughes Aircraft Company Tucson, Arizona

contract awards

AIR FORCE

y Ballistic Missile Division:

1,000,000—Crosley Division, Avco Manufacturing Corp., Cincinnati, for new type of Command Receiver.

y Ogden Air Materiel Area, Hill AFB,

Itah:

533,036—Boeing Airplane Co., Pilotless Aircraft Division, Seattle, for technical data for *Bomarc* missile components (six contracts).

y Strategic Air Command:

400,000—Telecomputing Corp., Los Angeles, for data processing services at Vandenberg AFB, Calif.

ARMY

y U.S. Army Ordnance District, Phila-

lphia:

847,350—Western Electric Co., Inc., New York City, for Nike spare parts (nine contracts).

17,800—Princeton University, Princeton, N.J., for research and devel-

opment on guidance.

y U.S. Army Engineer Research and Development Laboratories, Ft. Belvoir,

- 511,189—General Mills, Inc., Mechanical Division, Minneapolis, for automatic tracking theodolite equipment for artillery survey system.
- y U.S. Army Ordnance Missile Comand, Redstone Arsenal, Ala.:
- 300,000—Southern Associated Engineers, Inc., Huntsville, Ala., for 75,000 manhours of technical services in missile and rocket programs.
- 253,568—Recordak Corp., Subsidiary of Eastman Kodak Co., New York, for microfilming of drawings and mountings of images into aperture cards and full operation of microfilming facilities for ABMA.
- 34,377—The William Brand and Co., Inc., Willimantic, Conn., for cable. 29,659—Reynolds Metals Co., Inc., Richmond, Va., for aluminum tubing, angle, sheet and plate.

46,189—John B. Moore Corp., Nutley, N.Y., for solvent oxylene.

y District Engineer, U.S. Army Engieer District, Fort Worth:

134,092—Suggs Construction Co., Big Spring, Tex., for storage of base of rocket assembly at Big Spring AFB.

high-energy fuel briefs from Callery

Successful start-up for new Muskogee, Oklahoma plant — Callery is successfully operating the first of four major processing units at the new \$38,000,000 Navy HiCal plant at Muskogee, Oklahoma. This plant will provide many times the production capacity of any existing high-energy fuel facility.

Lawrence, Kansas plant producing tonnage quantities of HiCal—All of the immediate capacity of the Lawrence plant is now under military contract. However, we do hope to have some HiCal available in the near future for *authorized users*. If you—or your program—qualify, we'd welcome an opportunity to discuss the technical aspects of using these fuels for your project.

Write for new HiCal-3 Handling Bulletin.

R & D on new fuels and propellants? — Callery's R & D experience may prove helpful in attaining your long range objectives. Our current exploration in a number of new phases of development may coincide with one or more of your pet projects. Project teams with up-to-date facilities at their disposal can now be assigned to new programs. We'd like to talk with you about those areas of mutual interest in which Callery is best qualified.

Pyrophoric ramjet fuel: Triethylborane — TEB is spontaneously flammable in air. However, it does not react with water, and this is a distinct handling and operational advantage. TEB — with much wider flammability limits than hydrocarbons — virtually eliminates engine flameouts at high altitudes. Some of the advantages of using TEB as a primary ramjet fuel in place of hydrocarbon-fueled ramjets are: higher altitude operation, increased range, improved fuel economy and reliability, and lower cost vehicles.

Write for Technical Bulletin C-310 and Handling Bulletin C-311.

New 15-minute Triethylborane-Tributylborane fire-fighting film available for loan. Just write 9600 Perry Highway, Pittsburgh 37.

Washington, D. C. office opened by Callery — Fuel and propellant users in the Washington, D. C. area may now avail themselves of technical service at this new Callery office: Room 709, DuPont Circle Building, 1346 Connecticut Avenue, N.W. Phone Richard A. Carpenter, Manager, ADams 4-4200.

Note: Our recently opened office in Dayton, Ohio offers specialized technical assistance on fuels and propellants to interested parties in that area. Contact Anthony C. Hummel at 2600 Far Hills Avenue, phone AXminster 3-2752.



CHEMICAL COMPANY

9800 PERRY HIGHWAY

PITTSBURGH 37, PENNSYLVANIA

Richard A. Carpenter Manager, Washington Office Callery Chemical Company IMPORTANT ANNOUNCEMENT TO ALL ENGINEERS - EE, ME, AE, CE:

A New **Organization**

Now Forming at General Electric to Integrate and Direct

Systems Management

of Prime **Defense Programs**

From within General Electric, and from industry at large, talented scientists and engineers from diverse disciplines are coming together to form the nucleus of the new Defense Systems Department.

The responsibilities of this new group encompass management of theoretical and applied research as well as advanced development on major terrestrial and space-age systems.

Engineers and scientists interested in exploring the broad new possibilities in the Defense Systems Department are invited to investigate current openings.

Direct your inquiry in confidence to Mr. E. A. Smith Section G



DEFENSE SYSTEMS DEPARTMENT GENERAL SE ELECTRIC

300 South Geddes Street SYRACUSE, NEW YORK

when and where

JANUARY

Southwest Electronic Exhibit, Arizona State Fairgrounds, Phoenix, Jan. 21-23

Fifth Annual Radar Symposium (classified), Rackham Bldg., University of Michigan, Ann Arbor, Jan. 27-29.

Society of Plastics Engineers, 15th Annual Technical Conference, Hotel Commodore, York, Jan. 27-30.

Armour Research Foundation, Fifth Annual Midwest Welding Conference, Illinois Institute of Technology, Chicago, Jan. 28-29

University and Sylvania-Columbia Corning Nuclear Corporation, First International Symposium on Nuclear Fuel Elements, Columbia University, New York, Jan. 28-29.

FEBRUARY

14th Annual Technical and Management Conference, Reinforced Plastics Div., Society of the Plastics Industry, Inc., Edgewater Beach Hotel, Chicago, Feb. 3-5.

IRE, AIEE 1959 Solid State Circuits Conference, University of Pennsylvania, Philadelphia, Feb. 12-13

1959 Engineering Exposition, Balboa Park, San Diego. For information, contact exposition office at 422 Land Title Bldg., San Diego, Feb. 26-March 1.

MARCH

IRE, AIEE and Association for Computing Machinery, 1959 Western Joint Computer Conference, Fairmont Hotel, San Francisco, March 3-5.

Second Western Space Age Conferand Exhibit, Great ence Western Exhibit Center, Los Angeles, March 5-7.

Institute of the Aeronautical Sciences, Flight Propulsion Meeting (classified), Hotel Carter, Cleveland, March 5-6.

Western Space Age Conference and For Exhibit. information: Domestic Trade Dept., Los Angeles Chamber of Commerce, 404 South Bixel St., Los Angeles, March 5-7.

Gas Turbine Division of the American Society of Mechanical Engineers, Turbine in Action, Cincinnati, March 8-11.

Advertising correspondence should be addressed to Advertising Sales Manager, Missiles and Rockets, 17 East 48th Street, New York 17, N.Y.

REGIONAL OFFICES:

New York City: 17 E. 48th St., New York 17. Edward D. Muhifeld, Advertising Sales Manager; P. B. Kinney and G. T. O'Mara, regional adv. mgrs. Phone: PLaza 3-1100.

West Coast: 8929 Wilshire Blvd., Beverly Hills, Calif. Fred S. Hunter, manager: Walton Brown, regional adv. mgr., James W. Claar, regional adv. mgr. Phones: OLeander 5-9161 or Olympia

Chicago: 139 N. Clark St., Chicago 2, Ill. George E. Yonan, regional adv. mgr. Phone: CEntral 6-5804.

Cleveland: 244 Hanna Bidg., 1422 Euclid Ave., Cleveland 15, Ohio. Douglas H. Boynton, regional advertising manager. Phone: PRospect 1-2420.

Detroit: 201 Stephenson Bldg., Detroit 2, Mich. Kenneth J. Wells, regional advertising manager. Phone: TRinity vertising 5-2555.

Florida: 208 Almeria Ave., Coral Gables, Fla. Richard D. Hager, advertising sales representative. Phone: Highland 4-8326.

Canada: Allin Associates, 12 Richmond Street East, Toronto 1, Ontario, Phone: Harbour 6898. Allin Associates, 1487 Mountain St., Suite 4, Montreal, Que.

Geneva: American Aviation Pubs., 10 Rue Grenus, Geneva, Switzerland. Anthony Vandyk, European Director. Cable address: AMERAV GENEVA. London: Norall & Hart Ltd., 28 Bruton Street, London W. I., England. Phone: Grosvenn. 8356

Grosvenor 8356.

Paris: Jean-Marie Riche, 11 Rue Condor-cet, Paris (9e), France. Phone: TRU-daine, 15-39, Cable address: NEWS cet, Paris (s daine, 15-39 AIR PARIS.

Advertiser's Index

American Welding & Mfg. Co	2
Agency—The Bayless-Kerr Co.	36
Avco Mfg. Corp., Crosley Div	10.0
Baldwin-Lima-Hamilton, Loewy-Hydropress	
Div	28
Agency—Gray & Rogers Beattie-Coleman	32
Agency—Gaynor & Ducas Inc	32
Bendix Aviation Corp., Bendix Systems Div.	10
Agency—Gaynor & Ducas, Inc. Bendix Aviation Corp., Bendix Systems Div. Agency—MacManus, John & Adams, Inc.	
Callery Chemical Co. Agency—Ketchum, McLeod & Grove, Inc.	33
Class Cosp	
Clary Corp.	nc
Food Machinery & Chemical Corp	6
Agency-The McCarty Co.	
Agency—Erwin, Wasey, Ruthrauff & Ryan, Food Machinery & Chemical Corp	31
Reed, Inc.	
Harnischfeger Corp.	11
Agency-Hoffman, York, Paulson &	
Gerlach, Inc.	40
Hughes Aircraft Co. Agency—Foote, Cone & Belding	25
Hydro-Aire, Inc.	2
Agency-Gaynor & Ducas, Inc.	133
International Business Machines Corp	23
Agency—Benton & Bowles, Inc. Janitrol Aircraft Div., Surface Combustion	
Corp Surface Combustion	30
Agency-Odiorne Industrial Adv., Inc.	-
Loewy-Hydropress Div., Baldwin-Lima	10
	28
Agency—Gray & Rogers North American Aviation, Inc.	
Missile Development Div.	12
Missile Development Div	27
Agency—Batten, Barton, Durstine &	
Osborne, Inc. Radio Corp. of America	14
Agency—Al Paul Lefton Co., Inc.	3
Raybestos-Manhattan, Inc.	4
Agency-Gray & Rogers.	-
Reinhold Publishing Corp	32
Thiokol Chemical Corp.	36
Agency-Dancer-Fitzgerald-Sample, Inc.	1
United Aircraft Corp., Norden Div	A
Agency-Lennen & Newell, Inc.	15
Wyman-Gordon Co	10
A STATE OF THE PARTY OF THE PAR	
EMPLOYMENT SECTION	
General Electric Co	34
General Electric Co. Agency—Deutsch & Shea, Inc.	



New **NASHVILLE Division**

Structures for tomorrow's aircraft and missiles

To make ready for the future, Ayco Manufacturing Corporation has created a new division at its Nashville plant devoted to design, development and production of aircraft and missile structures and assemblies.

Avco's new Nashville Division (formerly a part of the Crosley Division) boasts an enviable 17-year record of building components for some of the country's most important aircraft, including the B-52, B-47 and B-36.

Today it produces components for these aircraft:

Convair 880 jet airliner—horizontal and vertical stabilizer; wing tip, leading and trailing edges and flaps.

C-130 Hercules transport—complete empennage.

F-102 Delta Dagger-wing trailing edge. F9F Cougar—horizontal stabilizer, flaperons and flaperettes.

Looking ahead, the Nashville Division has prepared itself to contribute to the Mach 3 aircraft and Mach 10 missiles that soon will go into production as part of the nation's defense effort.

The Nashville Division's skilled personnel have demonstrated their know-how in producing Avcomb. contoured stainless steel honeycomb

panels. They long ago proved themselves in the production of aluminum honeycomb structures, and other advanced

manufacturing techniques, such as metal bonding and chemical milling.

Avco/Nashville: proven ... ready for tomorrow

For further information, write: General Marketing Manager-Structures, Nashville Division, Avco Manufacturing Corporation, Nashville, Tennessee.

Avco Nashville

FORGING THE

FUTURE

OF

SOLID

PROPELLANT

ROCKETRY ..

THIOKOL

REDSTONE

DIVISION AT HUNTSVILLE, ALABAMA

At the Ordnance Missile Command, Huntsville, Alabama, Thiokol's Redstone Division pioneered the first successful, large, solid propellant rocket engines. Breaking the size barrier made possible such engines as today's Sergeant, and future solid propulsion systems for missiles in the IRBM and ICBM class.

Thiokol scientists at Redstone continue to lead in the development and application of the most advanced concepts in solid propellant rocketry.

Engineers, scientists—perhaps there's a place for you in Thiokol's expanding organization. Our new projects present challenging problems and the chance for greater responsibility.

Thiokol.



CHEMICAL CORPORATION
TRENTON, N. J. · ELKTON, MD. · HUNTSVILLE, ALA.

TRENTON, N. J. • ELKTON, MD. • HUNTSVILLE, ALA.

**AEMALL, TEXAS • MOSS POINT, MISS • BRIGHAM CITY, UTAH

DENVILLE, N. J. • BRISTOL, PA.

Registered trademark of the Thirkol Chemical Corporation for its liquid polymers, locket propellants, plasticizers and other chemical products.